




Style B3 900


WCB - 2220 PSI LCC - 2250 PSI CF8M - 2160 PSI

Product features


- Bolted 3 Piece Construction
- Swing Out Body Design
- Fully Enclosed Body Bolts
- Full Port
- Locking Device
- NPT or SW End Connections
- ASME B16.34 (Latest Revision)
- NACE MR0175 (Latest Revision)
- Blow Out Proof Stem
- Anti-Static Stem
- Dual Stem Seal
- Firesafe API 607 Rev. 6
- ISO 9001 (Latest Revision)
- API 598 (Latest Revision)
- ISO 15156 (Latest Revision)

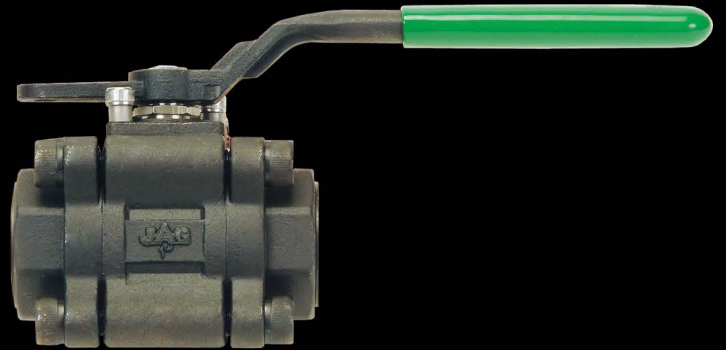

NO.	PARTS	NACE	LOW TEMP NACE	SS	QTY
1	BODY	WCB	LCC	CF8M	1
2	CAP	WCB	LCC	CF8M	2
3	GASKET	GRAPHITE	GRAPHITE	GRAPHITE	2
4	CAP SCREW	A193-B7M	A320-L7M	A193-B8	8
5	O-RING	VITON	VITON GLT	VITON GLT	1
6	SEAT	RTFE	RTFE	RTFE	1
7	BALL	CF8M	CF8M	CF8M	1
8	STEM	316	316	316	1
9	THRUST WASHER	RTFE	RTFE	RTFE	1
10	O-RING	VITON	VITON GLT	VITON GLT	2
11	PACKING	GRAPHITE	GRAPHITE	GRAPHITE	1
12	GLAND	304	304	304	1
13	WASHER	304	304	304	2
14	STOP BOLT	A2-70	A2-70	A2-70	2
15	HANDLE	WCB	WCB	CF8	1
16	STEM NUT	C/S	C/S	304	1
17	GRIP	PLASTIC	PLASTIC	PLASTIC	1

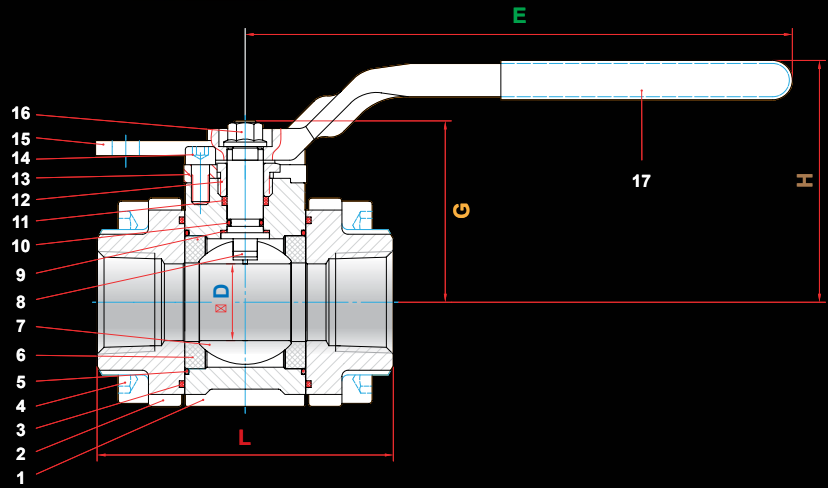

SIZE		D		L		H		E		G	
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
1/4"	6.4	0.5	12.7	2.9	73.0	2.7	69.0	5.9	150.0	1.9	47.5
3/8"	9.5	0.5	12.7	2.9	73.0	2.7	69.0	5.9	150.0	1.9	47.5
1/2"	12.7	0.5	12.7	2.9	73.0	2.7	69.0	5.9	150.0	1.9	47.5
3/4"	19.1	0.75	19.05	3.0	78.0	2.9	72.5	5.9	150.0	2.0	50.8
1"	25.4	1.0	25.4	3.8	98.0	3.1	79.0	7.1	180.0	2.4	60.0
1 1/4"	32.0	1.5	38.0	4.8	122.0	3.9	98.5	9.3	237.0	3.2	81.0
1 1/2"	38.1	1.5	38.0	4.8	122.0	3.9	98.5	9.3	237.0	3.2	81.0
2"	50.8	2.0	50.0	5.8	148.0	4.2	107.5	9.3	237.0	3.5	90.0

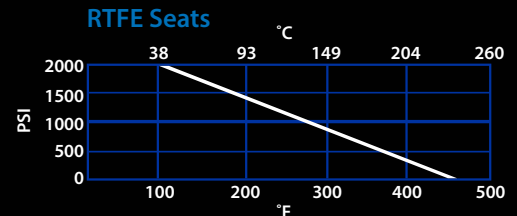

JAG Flocomponents Ltd.
 4123 - 53rd Avenue NW, Edmonton, AB, CANADA T6B 3R5
 Ph: 780.485.2333 • Fax: 780.485.2316
 Email: info@jagflo.com • www.jagflo.com



JAG reserves the right to change design, materials or specifications without notice and free of obligation to furnish or install such changes on products previously sold.

Printed in Canada
 01/2021